




CIRQA HYDRO


Hydro is IP65 and IK08 as standard for exposed areas and small spaces. Available with occupancy & daylight sensing for energy saving replacements for fluorescent and fixed output legacy versions.

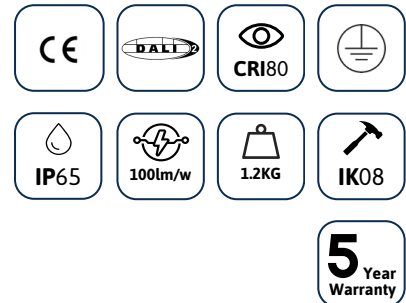

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	White (W)
Dimensions	Ø316mm x 83mm
Lumen Output	1400lm (14W)
Colour Temperature	3000K-4000K-6500K Switchable (CCT3465)
Colour Rendering Index	CRI80
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD), Microwave (MW), PIR Sensor (PIR), Corridor Function (CF) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

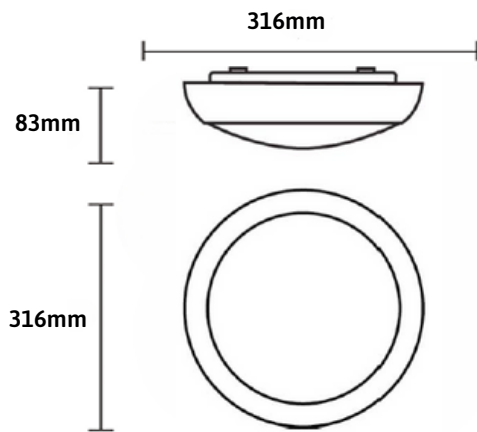

PRODUCT SHOWCASE



PRODUCT CODE

CQAHYD/SM/W/1400LM/CCT3465/80/OP/65/DD/EM3

Cirqa Hydro, surface mounted, white finish, 1400 lumens, 3000K-4000K-6500K Switchable, CRI80, opal diffuser, IP65 rated, DALI Dimming, 3 hour emergency

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK