




EDGE LIGHTING

CLIQ 1500


Clmq is a versatile trunking system with choice of optics, expertly engineered to connect mechanically and electrically simultaneously, for unparalleled speed of installation. Customisable with linear, spotlight and sensor attachments.

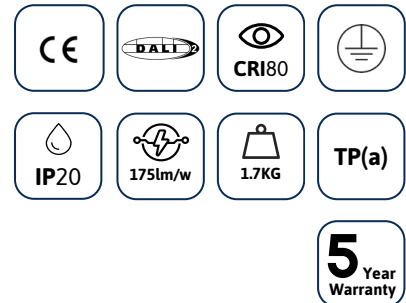

TECHNICAL INFORMATION

| | |
|-------------------------------|--|
| Installation | Suspended (SS) |
| Body Colour | White (W), Black (B) or Silver (S) |
| Dimensions | 76mm x 70mm x 1500mm |
| Lumen Output | 2400lm (24W) or 6000lm (34W) |
| Colour Temperature | 2700K, 3000K, 4000K |
| Colour Rendering Index | CRI80 |
| Optical Distribution | Wide Beam (WB), Flood (FL), Asymmetric Beam (AB) or Opal Diffuser (OP) |
| Ingress Protection | IP20 |
| Controls | Fixed Output (FO), DALI (DD), Microwave (MW) or PIR Sensor (PIR) |
| Emergency | 3 Hour Emergency (EM3) or DALI Emergency (EMD) |
| Accessories | - |

DIMENSIONS

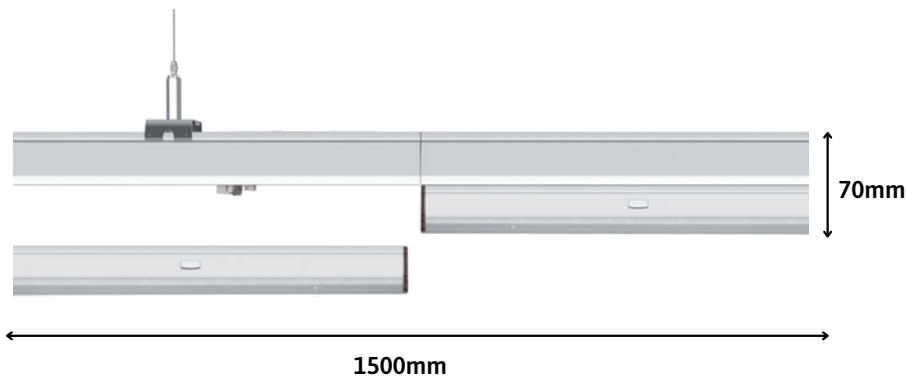

PRODUCT SHOWCASE



PRODUCT CODE

CLIQ1500/SS/W/2400LM/4000K/80/WB/20/DD

Cliq 1500m, suspended, white finish, 2400 lumens, 4000K, CRI80, wide beam, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK