



DOMO 16





















TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Grey (G)
Dimensions	16mm x 16mm x desired length (mm)
Lumen Output (per metre)	500lm (5W), 1000lm (10W), 1500lm (15W) or 2000lm (20W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS



PRODUCT SHOWCASE

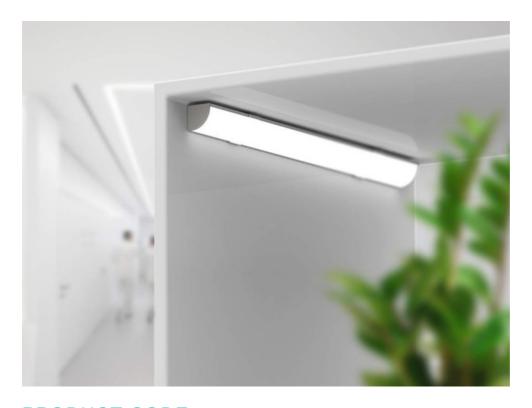

PRODUCT CODE

DOM16/SM/G/2000/1500LM/4000K/90/OP/20/DD

Domo 16, surface mounted, grey finish, 2000mm, 1500 lumens per metre, 4000K, CRI90, opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.





