




EDGE
LIGHTING

ECLIPSE S400


Slim in profile with minimal trim, our Eclipse maximises lit surface area for a comfortable, low glare environment. S400 is wall mounted for circulation and breakout spaces.

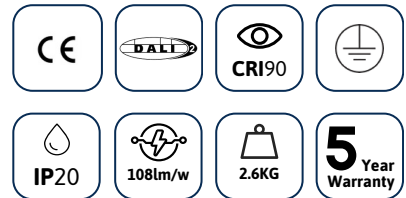

TECHNICAL INFORMATION

| | |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Installation | Surface Mounted (SM) |
| Body Colour | Black (B) |
| Dimensions | Ø400mm x 86mm |
| Lumen Output | 3500lm (33W) or 4300lm (40W) |
| Colour Temperature | 3000K, 4000K, or 5700K |
| Colour Rendering Index | CRI90 |
| Optical Distribution | Direct: Opal Diffuser (OP) or Microprism Diffuser (MP) Direct/Indirect: Opal Diffuser (IDOP) or Microprism Diffuser (IDMP) |
| Ingress Protection | IP20 |
| Controls | Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS) |
| Emergency | 3 Hour Emergency (EM3) or DALI Emergency (EMD) |
| Accessories | - |

DIMENSIONS

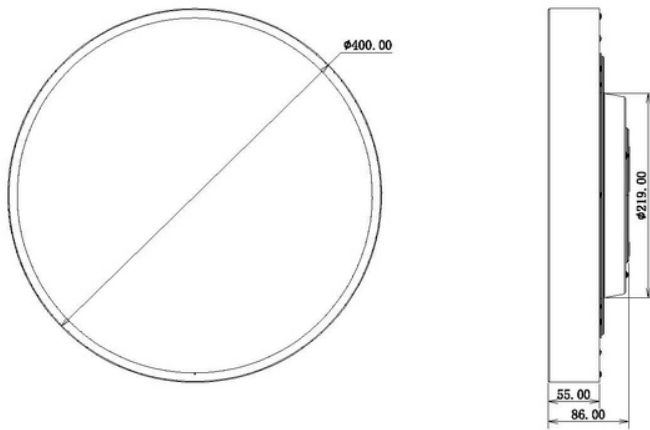

PRODUCT SHOWCASE



PRODUCT CODE

ECPS4/SM/B/4300LM/4000K/90/OP/20/DD

Eclipse S400, surface mounted, black finish, 4300 lumens, 4000K, CRI90, direct: opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK