




HITIQ HILINE


HiLine is optically diverse for racked or open area environments with a range of sensors available. Die-cast for industry grade protection to IP65 and IK10, engineered for reliability providing fit and forget installation.

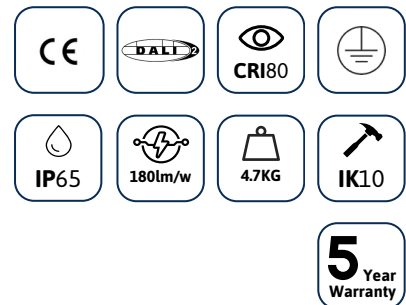

TECHNICAL INFORMATION

Installation	Suspended (SS) or Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	718mm x 137mm x 102mm
Lumen Output	10800lm (60W), 18000lm (100W) or 27,000 (150W)
Colour Temperature	3000K, 4000K or 5000K
Colour Rendering Index	CRI80
Optical Distribution	Asymmetric Narrow (AN) or Asymmetric Wide (AW)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD), Microwave (MW) or Photocell (PC)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

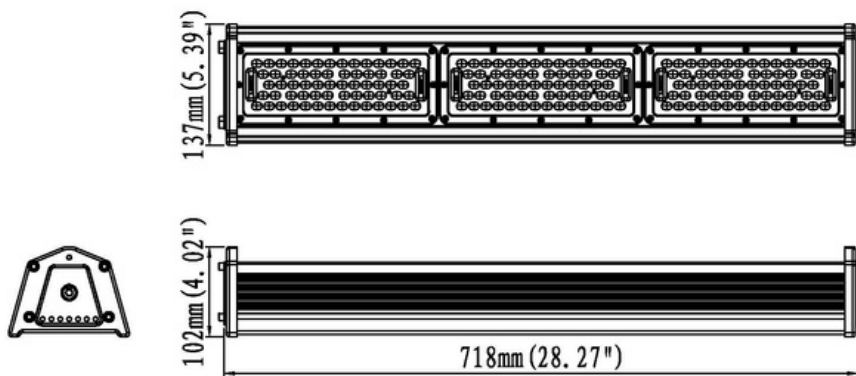

PRODUCT SHOWCASE



PRODUCT CODE

HILINE/SS/B/24000LM/4000K/80/AW/65/DD

Hiteq Hilite, suspended, black finish, 24000 lumens, 4000K, CRI80, Asymmetric Wide, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK