




EDGE
LIGHTING

HITEQ SOLAR


A modern take on a traditional sodium highbay for ambient warehouse lighting, the Solar is reliable for fit and forget with single point installation. Die-cast for industry grade protection to IP65 and IK10 with a range of sensors available.

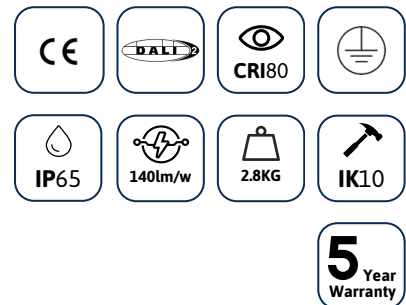

TECHNICAL INFORMATION

Installation	Suspended (SS) or Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	Ø265mm x 158mm
Lumen Output	9000lm (60W)
Colour Temperature	3000K, 4000K or 5700K
Colour Rendering Index	CRI80
Optical Distribution	Wide Beam (WB) or Flood (FL)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	Polycarbonate Reflector 60° (PC6), Aluminium Reflector 100° (AL10)

DIMENSIONS

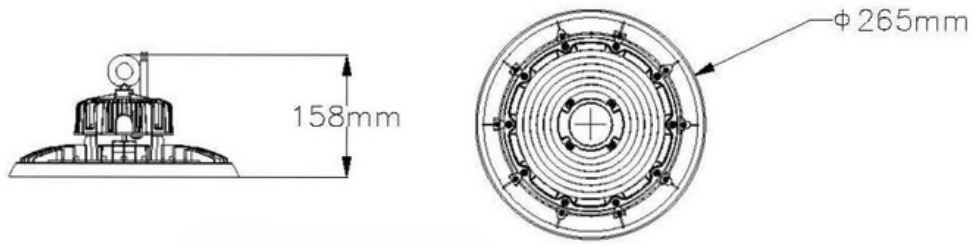

PRODUCT SHOWCASE



PRODUCT CODE

HISOLAR/SS/B/8400LM/4000K/80/WB/20/DD

Hiteq Solar, suspended, black finish, 8400 lumens, 4000K, CRI80, wide beam, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK