




**EDGE**  
LIGHTING

## LINTEQ 16


Surface mounted linear LED luminaire for continuous or individual installation. Deep profile design allows for even illumination over the surface for premium finish.

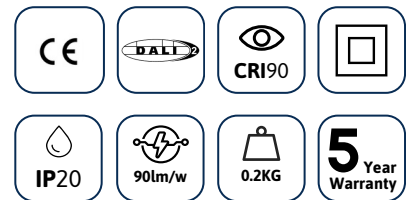

### TECHNICAL INFORMATION

<b>Installation</b>	Surface Mounted (SM) or Suspended (SS)
<b>Body Colour</b>	Grey (G)
<b>Dimensions</b>	16mm x 12mm x desired length (mm)
<b>Lumen Output (per metre)</b>	500lm (5W), 1000lm (10W), 1500lm (15W) or 2000lm (20W)
<b>Colour Temperature</b>	2700K, 3000K, 4000K, Tuneable White or RGBW
<b>Colour Rendering Index</b>	CRI90
<b>Optical Distribution</b>	Opal Diffuser (OP)
<b>Ingress Protection</b>	IP20
<b>Controls</b>	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
<b>Emergency</b>	3 Hour Emergency (EM3) or DALI Emergency (EMD)
<b>Accessories</b>	-

## DIMENSIONS

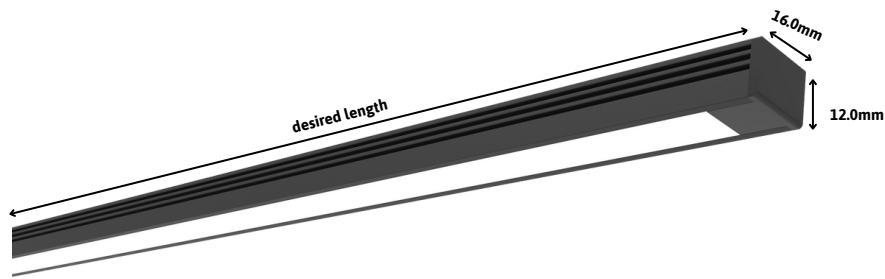

## PRODUCT SHOWCASE



## PRODUCT CODE

**LIN16/SM/G/2000/1000LM/4000K/90/OP/20/FO**

Linteq 16, surface mounted, grey finish, 2000mm, 1000 lumens per metre, 4000K, CRI90, opal diffuser, IP20 rated, fixed output

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ [sales@edgelighting.co.uk](mailto:sales@edgelighting.co.uk)



**EDGE**  
LIGHTING

[EDGELIGHTING.CO.UK](http://EDGELIGHTING.CO.UK)