




EDGE LIGHTING

LINTEQ 26


Surface mounted linear LED luminaire for continuous or individual installation. Deep profile design provides even illumination for architectural features.

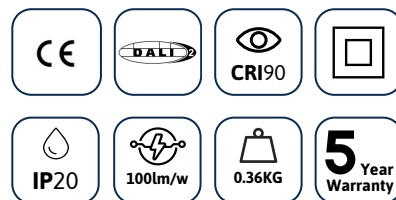


TECHNICAL INFORMATION

Installation	Surface Mounted (SM) or Suspended (SS)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	26mm x 27mm x desired length (mm)
Lumen Output (per metre)	500lm (5W), 1000lm (10W), 1500lm (15W) or 2000lm (20W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

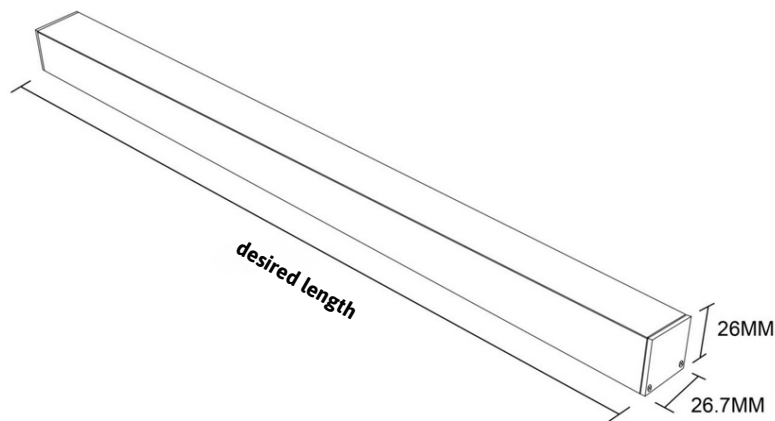

PRODUCT SHOWCASE

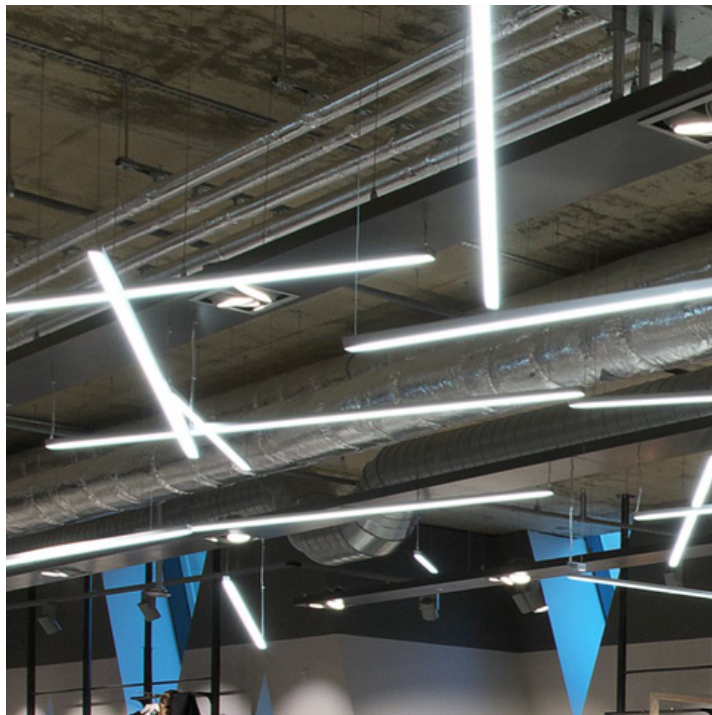

PRODUCT CODE

LIN26/SM/B/2000/1000LM/4000K/90/OP/20/FO

Linteq 26, surface mounted, black finish, 2000mm, 1000 lumens per metre, 4000K, CRI90, opal diffuser, IP20 rated, fixed output

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK