




# EDGE LIGHTING

## TOUGHTEQ 1200


Protected to IP65 and IK08, our Toughteq is durable for industrial grade impact resistance and outdoor wet areas. Available with integrated sensors for longevity and ease of installation for a wide range of applications.

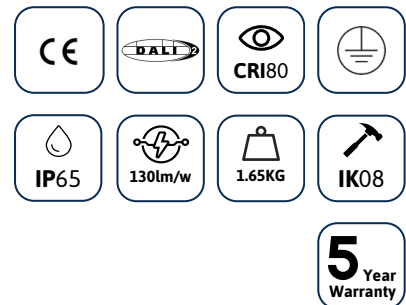

### TECHNICAL INFORMATION

<b>Installation</b>	Surface Mounted (SM)
<b>Body Colour</b>	Grey (G)
<b>Dimensions</b>	95mm x 80mm x 1200mm
<b>Lumen Output</b>	2100lm (16W), 3100lm (24W) or 4000lm (32W)
<b>Colour Temperature</b>	4000K
<b>Colour Rendering Index</b>	CRI80
<b>Optical Distribution</b>	Opal Diffuser (OP)
<b>Ingress Protection</b>	IP65
<b>Controls</b>	Fixed Output (FO), DALI (DD), Microwave (MW), PIR Sensor (PIR) or Casambi (CS)
<b>Emergency</b>	3 Hour Emergency (EM3) or DALI Emergency (EMD)
<b>Accessories</b>	-

## DIMENSIONS

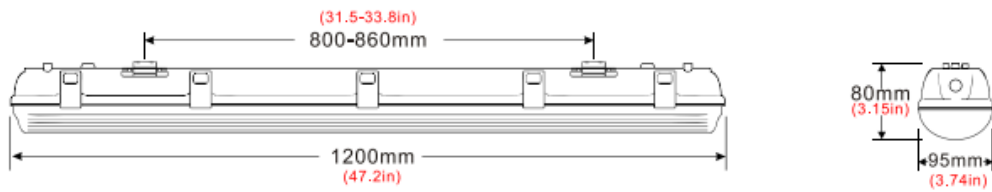

## PRODUCT SHOWCASE



## PRODUCT CODE

**TGH1200/SM/G/4000LM/4000K/80/OP/65/DD**

Toughteq 1200mm, surface mounted, grey finish, 4000 lumens, 4000K, CRI80, opal diffuser, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ [sales@edgelighting.co.uk](mailto:sales@edgelighting.co.uk)



**EDGE**  
LIGHTING

[EDGELIGHTING.CO.UK](http://EDGELIGHTING.CO.UK)