




EDGE LIGHTING

TOUGHTEQ 1500


Durable for industrial grade impact resistance and outdoor wet areas, ToughTEQ is the smart choice for a wide range of applications. Available with integrated sensors for longevity and ease of installation.

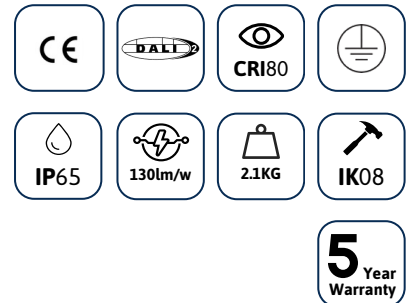

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Grey (G)
Dimensions	95mm x 80mm x 1500mm
Lumen Output	2900lm (22W), 6000lm (45W) or 9500lm (73W)
Colour Temperature	4000K
Colour Rendering Index	CRI80
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD), Microwave (MW), PIR Sensor (PIR) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

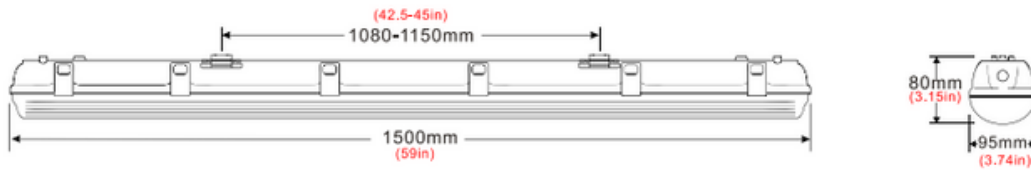

PRODUCT SHOWCASE



PRODUCT CODE

TGH1500/SM/G/6000LM/4000K/80/OP/65/DD

Toughteq 1500mm, surface mounted, grey finish, 6000 lumens, 4000K, CRI80, opal diffuser, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK