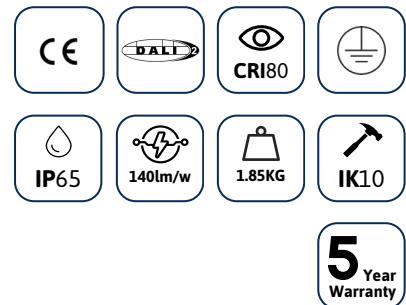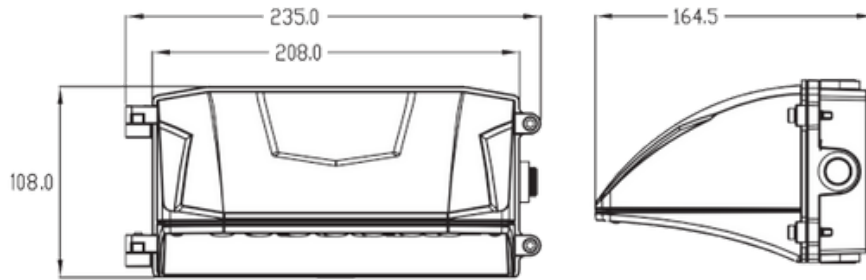# EDGE LIGHTING

TRITON NODE

Sympathetic to wildlife and the environment with zero upward light and 3000K as standard, the Node is a compact wall mounted luminaire for area lighting with a range of lumen packages.

CE | DALI | CRI80 | ⏚

IP65 | 140lm/w | 1.85KG | IK10

5 Year Warranty

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	235mm x 165mm x 108mm
Lumen Output	4200lm (30W) or 7000lm (50W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI80
Optical Distribution	Asymmetric Wide Forward Throw (AF)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD) or Photocell (PC)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

PRODUCT SHOWCASE

PRODUCT CODE

TRINODE/SM/B/4200LM/3000K/80/AW/65/PC

Triton Node, surface mounted, black finish, 4200 lumens, 3000K, CRI80, Asymmetric Wide, IP65 rated, Photocell

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.

Contact us for more information

020 8687 0190   sales@edgelighting.co.uk   in

EDGE LIGHTING

EDGELIGHTING.CO.UK