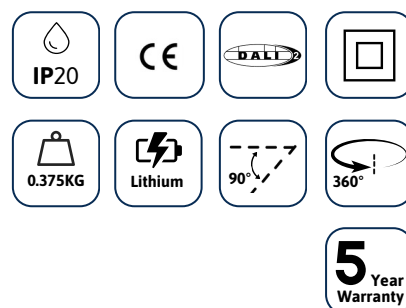




**EDGE**  
LIGHTING

## EMTEQ PRO2

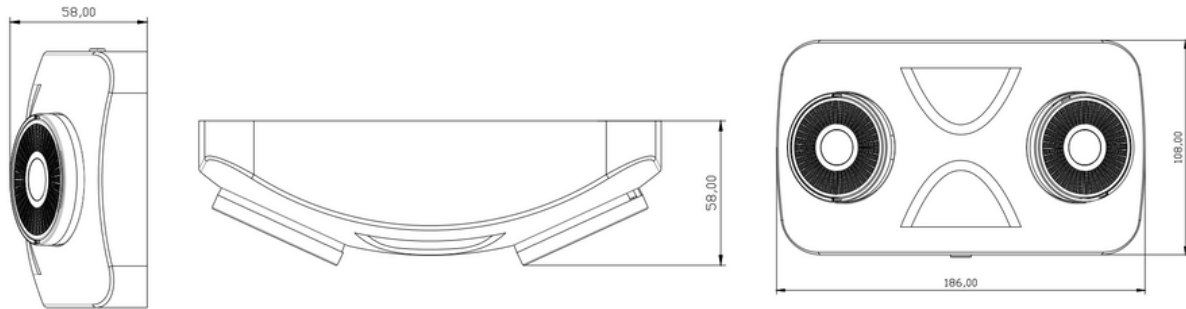
A modern take on legacy Frogeye emergencies, the Pro2 boasts two tiltable spotlight beams, typically used in high exposed ceiling applications. Self-test as standard with long lasting lithium batteries for peace of mind.







### TECHNICAL INFORMATION

<b>Installation</b>	Surface Mounted (SM)
<b>Body Colour</b>	White (W) or Black (B)
<b>Dimensions</b>	186mm x 108mm x 58mm
<b>Lumen Output</b>	400lm (4W)
<b>Discharge Duration</b>	3 Hours
<b>Test Mode</b>	Auto Test (AT) or DALI Emergency (EMD)
<b>Optical Distribution</b>	Corridor (CO) or Open Area (OA)
<b>Ingress Protection</b>	IP20
<b>Battery Type</b>	LiFePO4 6.4V 1500mAh
<b>Legends Supplied</b>	-
<b>Accessories</b>	-

## DIMENSIONS



## SPACING TABLE GUIDE (ROUND LENS)

Height (m)				
2	3	7.5	3.8	8.9
2.5	3	7.5	4.2	10
3	3.2	8.1	4.6	10.6
3.5	3.5	8.4	5	11.1
4	3.8	8.8	5.4	12.1
4.5	3.9	9	5.4	12.8
5	4	9.2	5.6	13.2

## PRODUCT CODE

**EMPRO2/SM/W/400LM/AT/OA/20**

Emteq Pro2, surface mounted, white finish, 400 lumens, automatic test, open area, IP20 rated

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



**EDGE**  
LIGHTING

EDGELIGHTING.CO.UK